



# Optical Fiber Routing On-board or Backplanes


## *Optical Circuitry*

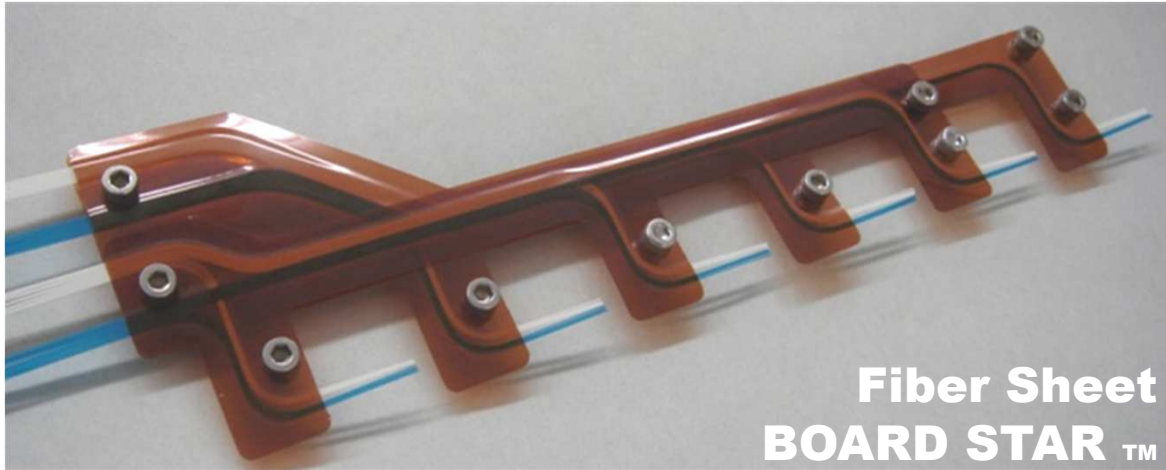


**Fiber Sheet BOARD STAR™**




Fiber Shuffle

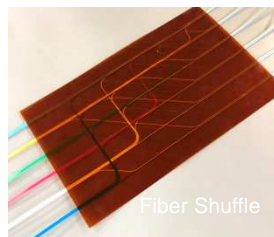

Fiber Shuffle



Ribbon Shuffle

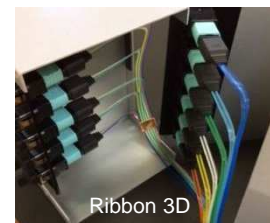

Ribbon 3D

### Features

- Compact and high density optical fiber routing
- Free design in size, shape, and routing pattern
- Choice of sheet or ribbon according to the application
- Flame retardant type available

### Optical Fiber Sheet SPEC

Thickness	0.5mm to 2.5mm (depend on routing pattern and number of fiber layers at intersection)
Board size	≦800mm×110mm (depend on leg)
Length of leg	<500mm (treatment method to ask us)



Laminate type



Rubber coating type

### Applications

- ◆ On-board/Intra-rack fiber management
- ◆ Optical Fiber shuffles
- ◆ Optical fan-outs
- ◆ Optical back planes

